




STYN20110

Discrete Thyristors(SCRS)



Dimensions TO-247P

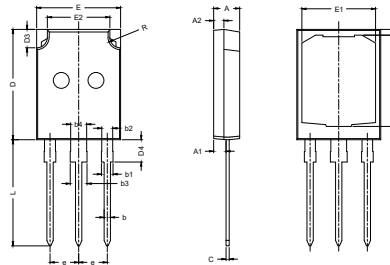

Dim.	Millimeter		Dim.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.85	5.10	D2	0.96	1.25
A1	2.31	2.51	D3	3.35	3.80
A2	1.85	2.10	D4	3.95	4.45
b	1.16	1.26	E	15.80	16.05
b1	/	2.25	E1	13.50	14.40
b2	1.96	2.15	E2	11.25	12.45
b3	/	3.25			
b4	2.96	3.15	e	5.44(BSC)	
c	0.59	0.66	L	19.80	20.25
D	20.85	21.10			
D1	17.15	17.75	R	1.90	2.10

	V_{RRM} V	V_{RSM} V
STYN20110	2000	2100

Symbol	Test Conditions		Maximum Ratings	Unit
I_{TRMS} I_{TAVM}	$T_V = T_{VJM}$ $T_C = 85^\circ\text{C}; 180^\circ \text{ sine}$		110 70	A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	$t = 10\text{ms (50Hz), sine}$ $t = 8.3\text{ms (60Hz), sine}$	1100 1190	A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10\text{ms (50Hz), sine}$ $t = 8.3\text{ms (60Hz), sine}$	935 1010	
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	$t = 10\text{ms (50Hz), sine}$ $t = 8.3\text{ms (60Hz), sine}$	6050 5890	A^2s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10\text{ms (50Hz), sine}$ $t = 8.3\text{ms (60Hz), sine}$	4370 4250	
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $f = 50\text{Hz}, t_p = 200\mu\text{s}$ $V_D = 2/3 V_{DRM}$ $I_G = 0.3\text{A}$ $di_G/dt = 0.3\text{A}/\mu\text{s}$	repetitive, $I_T = 330\text{A}$	150	A/ μs
		non repetitive, $I_T = 110\text{A}$	500	
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM};$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$V_{DR} = 2/3 V_{DRM}$	1000	V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$ $I_T = I_{TAVM}$	$t_p = 30\mu\text{s}$ $t_p = 300\mu\text{s}$	10 5	W
P_{GAV}			0.5	W
V_{RGM}			10	V
T_{VJ} T_{VJM} T_{stg}			-40...+150 125 -40...+150	$^\circ\text{C}$
M_d F_c	Mounting torque (M3) Mounting force with clip		0.8...1.2 20...120	Nm N
Weight	typical		6	g


Sirectifier®

STYN20110

Discrete Thyristors(SCRS)

Symbol	Test Conditions	Characteristic Values	Unit
I_R, I_D	$T_{VJ}=T_{VJM}; V_R=V_{RRM}; V_D=V_{DRM}$	5	mA
V_T	$I_T=110A; T_{VJ}=25^{\circ}C$	1.37	V
V_{TO}	For power-loss calculations only ($T_{VJ}=125^{\circ}C$)	0.82	V
r_T		5.2	mΩ
V_{GT}	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	1.5 1.6	V
I_{GT}	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$ $T_{VJ}=125^{\circ}C$	40 80 50	mA
V_{GD}	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	0.2	V
I_{GD}		5	mA
I_L	$T_{VJ}=25^{\circ}C; t_p=10\mu s;$ $I_G=0.3A; di_G/dt=0.3A/\mu s$	150	mA
I_H	$T_{VJ}=25^{\circ}C; V_D=6V; R_{GK}=\infty$	100	mA
t_{gd}	$T_{VJ}=25^{\circ}C; V_D=1/2V_{DRM}$ $I_G=0.3A; di_G/dt=0.3A/\mu s$	2	us
R_{thJC}	DC current	0.2	K/W
R_{thCH}	DC current	0.15	K/W
a	Max. acceleration, 50 Hz	50	m/s ²

Product Marking

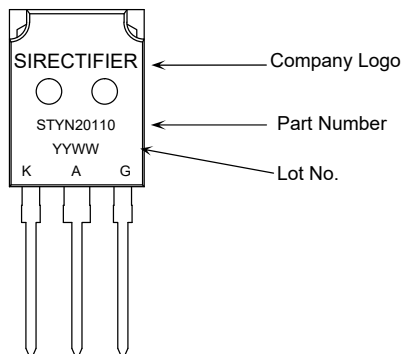

Features / Advantages:

- Thyristor for line frequency
- Glass passivated chip

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Standard applicable to Power Semiconductors

- IEC191-1/
- IEC747-
- IEC747-
- IEC68-2-...
- IUL94-V

Package: TO-247P

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Product Reliability

- IEC147-
- IEC68-2-1
- IEC68-2-2
- IEC68-2-2
- CECC50000-4.4.



Part Number	Package	Shipping	Marking Code
STYN20110	TO-247P	30pcs / Tube	STYN20110

Sirectifier®

STYN20110

Discrete Thyristors(SCRs)

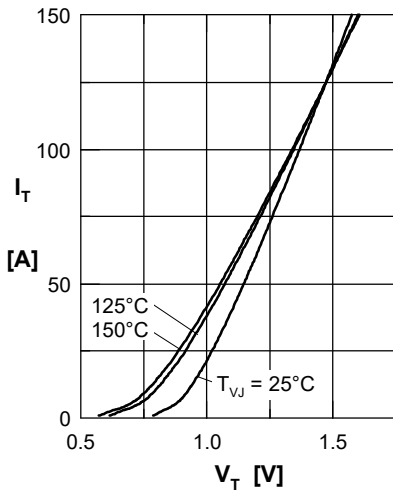


Fig. 1 Forward characteristics

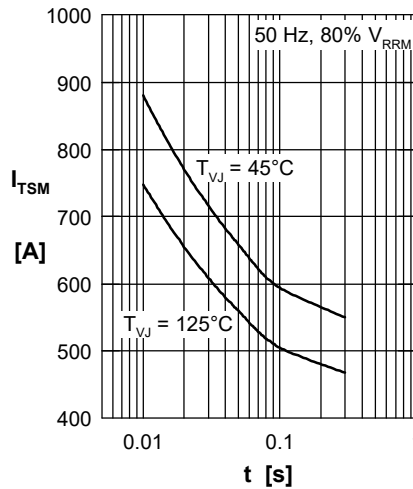


Fig. 2 Surge overload current

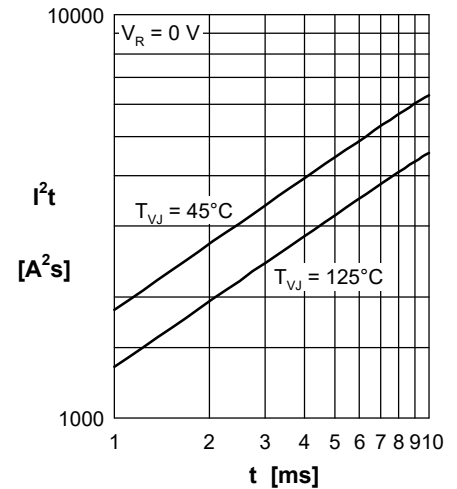


Fig. 3 I^2t versus time (1-10 ms)

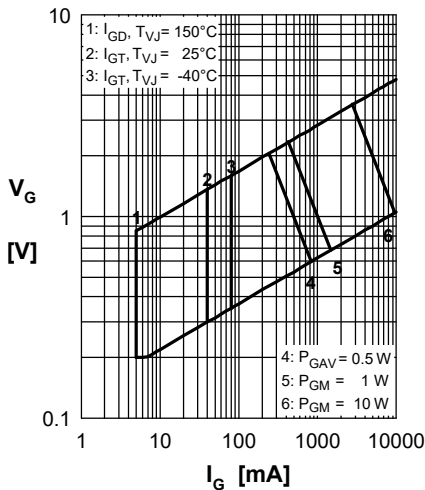


Fig. 4 Gate trigger characteristics

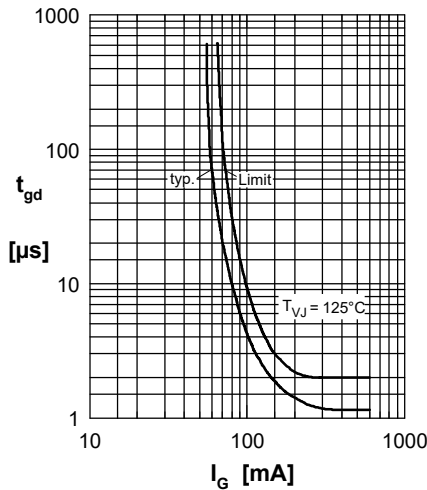


Fig. 5 Gate controlled delay time

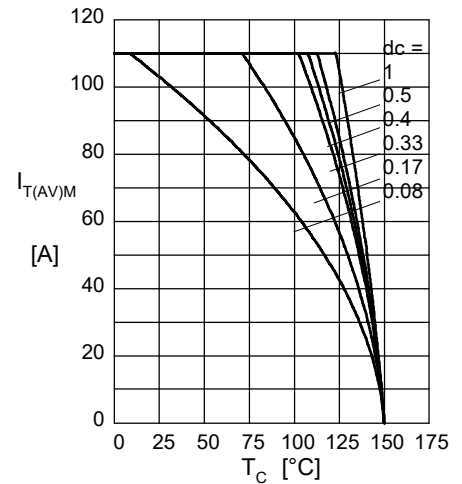


Fig. 6 Max. forward current at case temperature

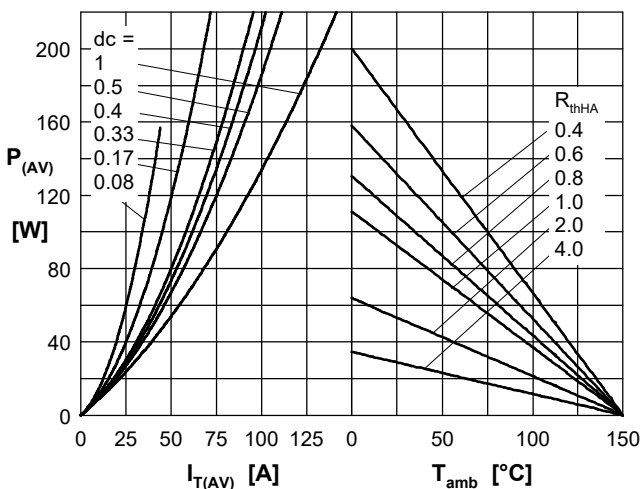


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

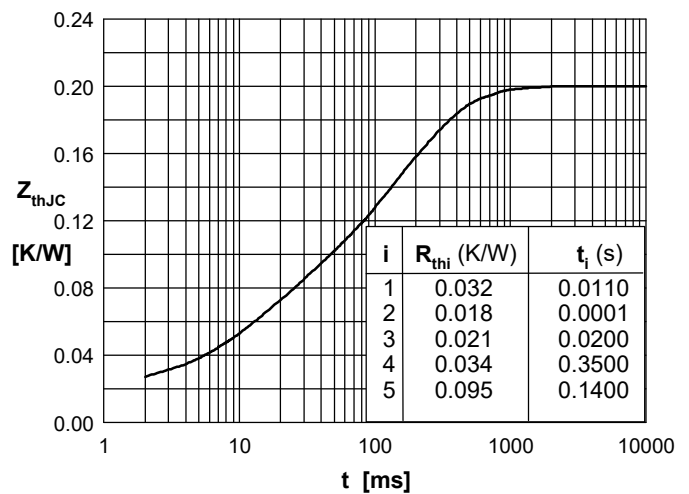


Fig. 8 Transient thermal impedance

Sirectifier®