




STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules



Type	V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V
STT(D)570GK08BT	900	800
STT(D)570GK12BT	1300	1200
STT(D)570GK14BT	1500	1400
STT(D)570GK16BT	1700	1600
STT(D)570GK18BT	1900	1800
STT(D)570GK20BT	2100	2000
STT(D)570GK22BT	2300	2200
STT(D)570GK24BT	2500	2400
STT(D)570GK26BT	2700	2600

Dimensions in mm (1mm=0.0394")

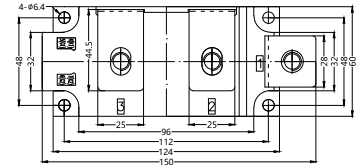

Symbol	Test Conditions	Maximum Ratings	Unit
I_{TRMS} , I_{FRMS} I_{TAVM} , I_{FAVM}	$T_V = T_{VJM}$ $T_C = 85^\circ C$; 180° sine	895 570	A
I_{TSM} , I_{FSM}	$T_V = 45^\circ C$ $V_R = 0$ $t = 10ms$ (50Hz), sine $t = 8.3ms$ (60Hz), sine	17000 20500	A
	$T_V = T_{VJM}$ $V_R = 0$ $t = 10ms$ (50Hz), sine $t = 8.3ms$ (60Hz), sine	14200 17000	
$\int i^2 dt$	$T_V = 45^\circ C$ $V_R = 0$ $t = 10ms$ (50Hz), sine $t = 8.3ms$ (60Hz), sine	1450000 990000	A^2s
	$T_V = T_{VJM}$ $V_R = 0$ $t = 10ms$ (50Hz), sine $t = 8.3ms$ (60Hz), sine	1210000 82000	
$(di/dt)_{cr}$	$T_V = T_{VJM}$ $f = 50Hz$, $t_p = 200\mu s$ $V_D = 2/3 V_{DRM}$ $I_G = 1A$ $di_G/dt = 1A/\mu s$	repetitive 200	A/ μs
	non repetitive	500	
$(dv/dt)_{cr}$	$T_V = T_{VJM}$; $R_{GK} = \infty$; method 1 (linear voltage rise)	$V_{DR} = 2/3 V_{DRM}$ 1000	V/ μs
P_{GM}	$T_V = T_{VJM}$ $I_T = I_{TAVM}$	$t_p = 30\mu s$ 120 $t_p = 500\mu s$ 60	W
P_{GAV}		20	W
V_{RGM}		10	V
T_V T_{VJM} T_{stg}		-40...+130 130 -40...+125	$^\circ C$
V_{ISOL}	50/60Hz, RMS $I_{ISOL} \leq 1mA$	$t = 1min$ 3000 $t = 1s$ 3600	V~
M_d	Mounting torque (M6) Terminal connection torque (M8)	4.5-7/40-60 11-13/97-115	Nm/lb.in.
Weight	Typical	1300	g

STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_{RRM}	$T_{VJ}=T_{VJM}; V_R=V_{RRM}$	30	mA
V_{TM}	$I_{TM}=1790A; T_{VJ}=25^{\circ}C$	1.65	V
V_{TO}	For power-loss calculations only ($T_{VJ}=T_{VJM}$)	0.8	V
r_T		0.38	m Ω
V_{GT}	$V_D=6V;$ $T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	2 3	V
I_{GT}	$V_D=6V;$ $T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	300 400	mA
V_{GD}	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	0.25	V
I_{GD}	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	10	mA
I_L	$T_{VJ}=25^{\circ}C; t_p=30\mu s; V_D=6V$ $I_G=1A; di_G/dt=1A/\mu s$	400	mA
I_H	$T_{VJ}=25^{\circ}C; V_D=6V; R_{GK}=\infty$	300	mA
t_{gd}	$T_{VJ}=25^{\circ}C; V_D=1/2V_{DRM}$ $I_G=1A; di_G/dt=1A/\mu s$	2	μs
t_q	$T_{VJ}=T_{VJM}; I_T=500A; t_p=200\mu s; -di/dt=10A/\mu s$ $V_R=100V; dv/dt=50V/\mu s; V_D=2/3V_{DRM}$ typ.	350	μs
R_{thJC}	DC current	0.072	K/W
R_{thJK}	DC current	0.096	K/W
d_s	Creeping distance on surface	12.7	mm
d_A	Creepage distance in air	9.6	mm
a	Maximum allowable acceleration	50	m/s ²

FEATURES

- * International standard package
- * Copper base plate
- * Pressure Contact Technology
- * BusBar Terminal
- * Isolation voltage 3600 V~
- * UL file NO.310749
- * RoHS compliant

APPLICATIONS

- * Motor control, softstarter
- * Power converter
- * Heat and temperature control for industrial furnaces and chemical processes
- * Lighting control
- * Solid state switches

ADVANTAGES

- * Simple mounting
- * Improved temperature and power cycling
- * Reduced protection circuits



STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules

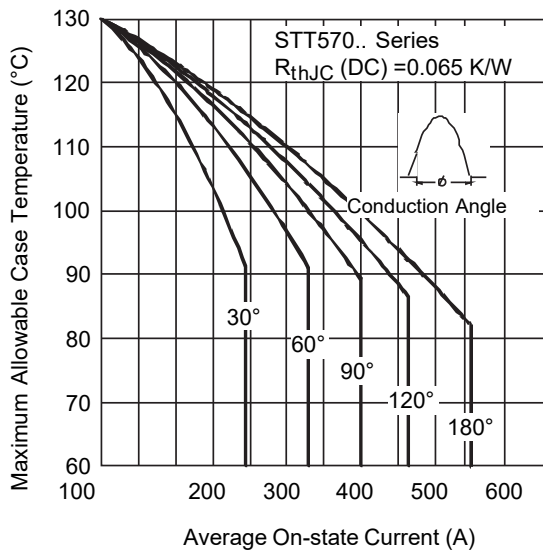


Fig. 1 - Current Ratings Characteristics

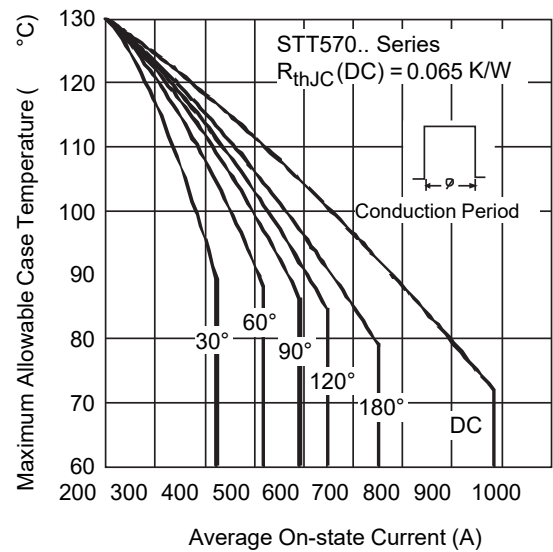


Fig. 2 - Current Ratings Characteristics

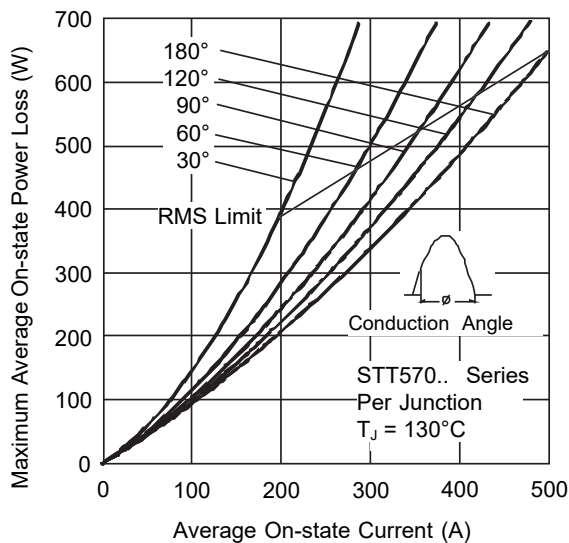


Fig. 3 - On-state Power Loss Characteristics

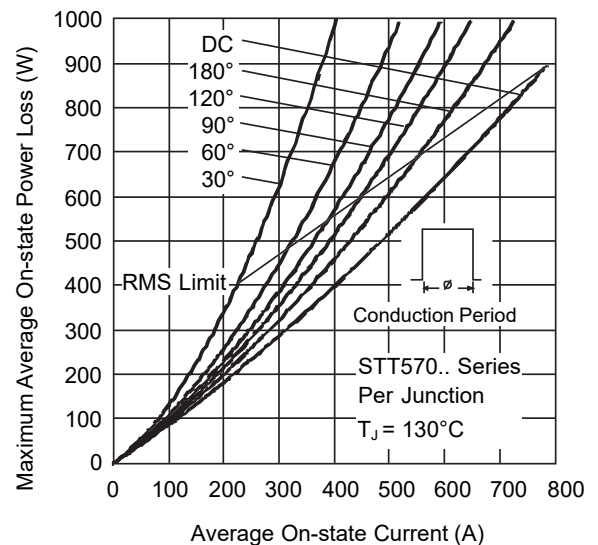


Fig. 4 - On-state Power Loss Characteristics

STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules

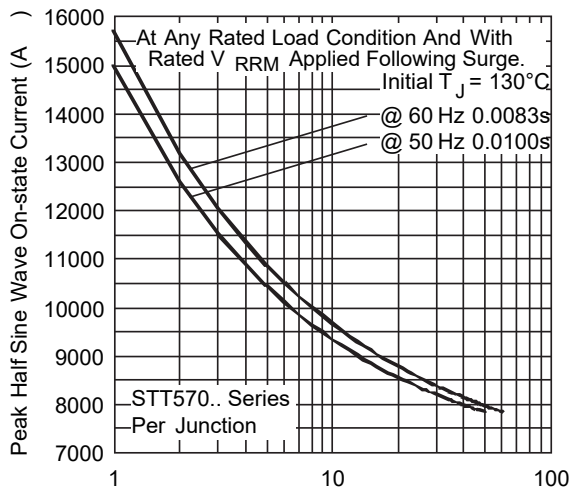


Fig. 5 - Maximum Non-Repetitive Surge Current

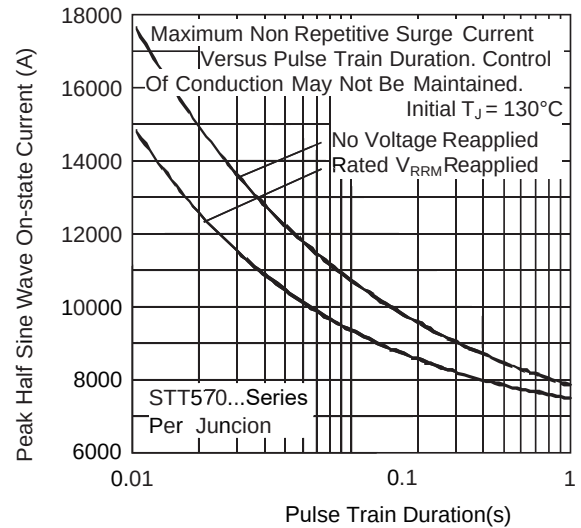


Fig. 6 - Maximum Non-Repetitive Surge Current

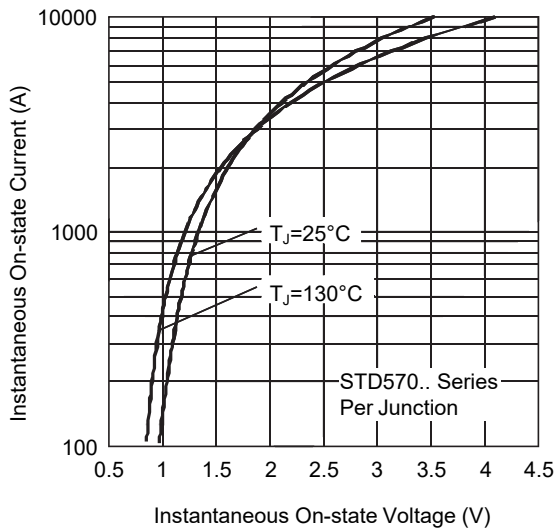


Fig. 7 - On-state Voltage Drop Characteristics

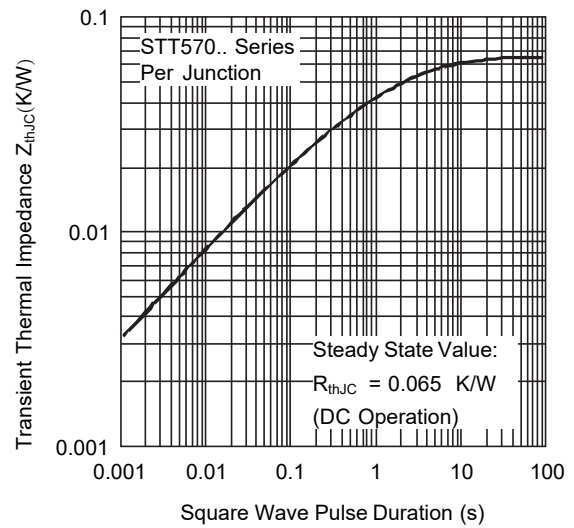


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics

STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules

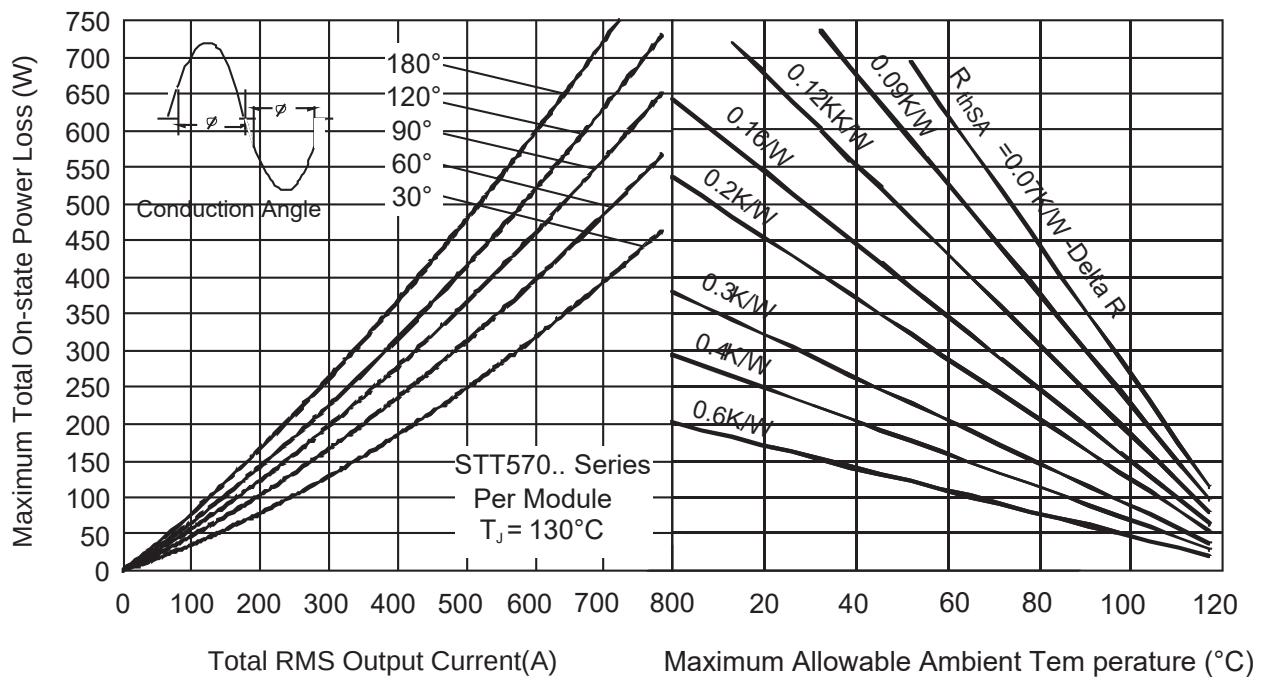


Fig. 9 - On-state Power Loss Characteristics

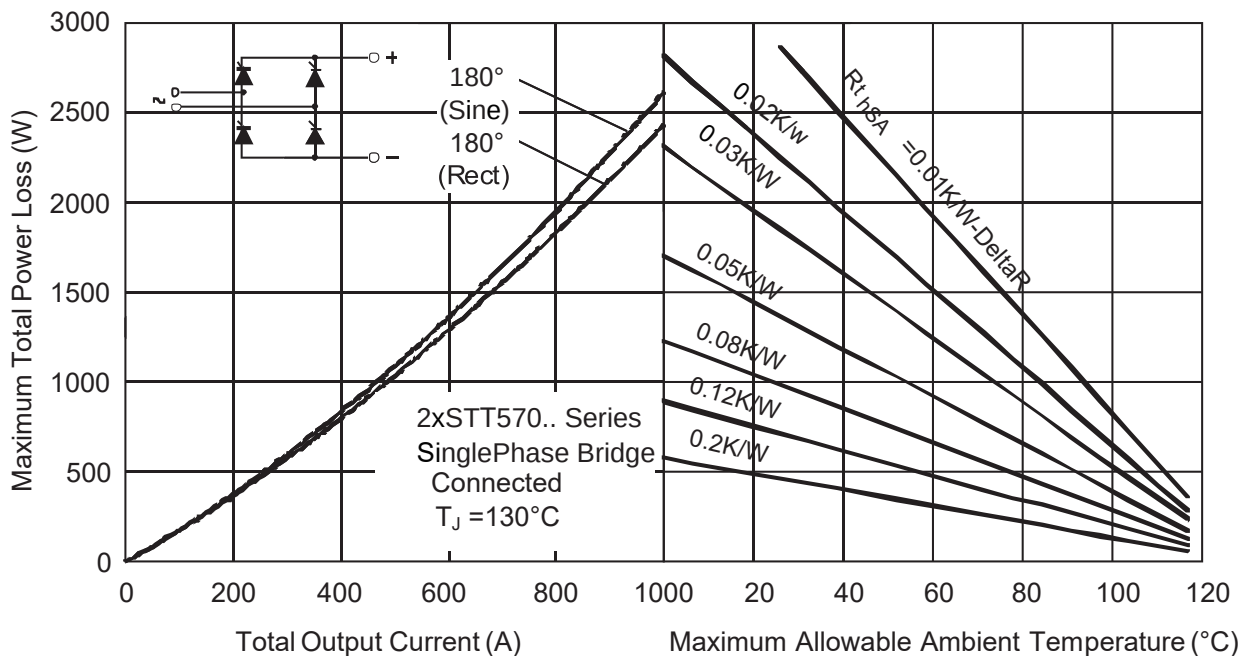


Fig. 10 - On-state Power Loss Characteristics

STT570GK08/26BT/STD570GK08/26BT

Thyristor-Thyristor Modules/Thyristor-Diode Modules

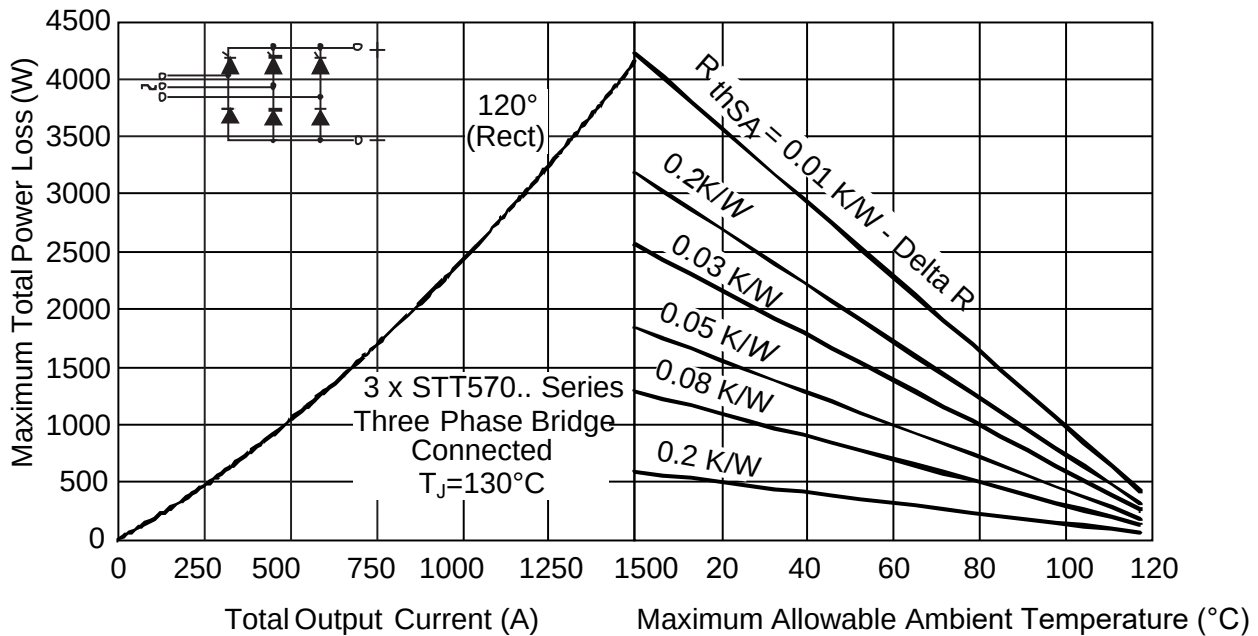


Fig. 11 - On-state Power Loss Characteristics

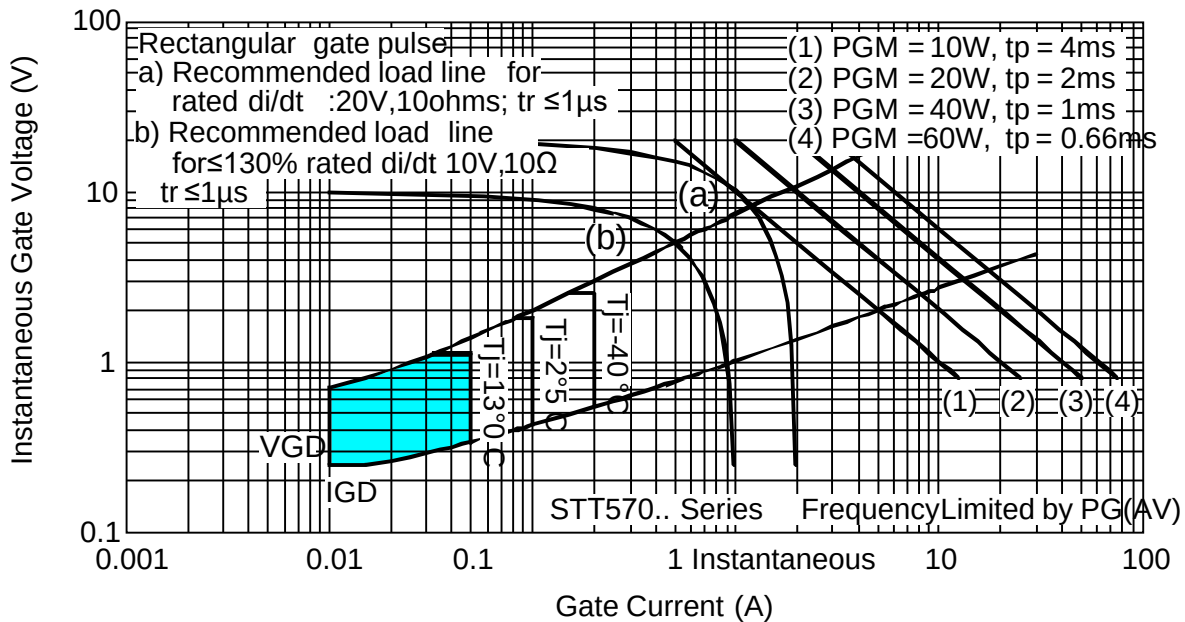


Fig. 12 - Gate Characteristics